



VIVAX
METROTECH

VM-880

Ferrous Metal Detector

- Field polarity indicator
- Ergonomic for prolonged usage
- Dot matrix LCD with back light
- Audio and visual signal strength
- Screen invert feature for pinpointing
- One touch auto sensitivity control with manual incremental control

In our ever-changing landscape, important assets are buried or paved over making finding for them both difficult and time consuming. Valve and manhole covers are often lost after ground work activities, re-surfacing or after heavy snow falls. Buried boundary markers can also be difficult to find.

Most of these items are manufactured using magnetic or ferrous materials. These can be detected using the VM-880. As it detects only ferrous materials, aluminum cans, bottle caps, etc. are rejected.

The simple audio and visual user interface has been designed to minimize training requirements while the latest technologies are employed to ensure maximum sensitivity and depth range. Particular attention has been made to ensuring the weight of the VM-880 is minimized, at just 1.54lbs (0.7kg), it is by far the lightest in its class. This has been achieved without compromise to strength. The submersible carbon fiber antenna tube is both lightweight and provides maximum protection to sensitive sensors.

Key features such as field polarity, 50/60Hz warning, continuous battery level, signal strength indicators and one touch sensitivity control include all the latest features required by an ever-demanding customer base.

Power

- Uses 2 X AA Alkaline batteries
- Provides over 28-hours of continuous usage

Display

- Crisp Dot matrix display with backlight
- Bar graph with signal strength

Audio


- Waterproof mylar speaker
- Peak audio tone response

Operation

- Simple four button controls
- Large buttons usable while wearing gloves

Construction

- Ergonomic design
- High impact ABS plastic
- Carbon-fiber submersible tube
- IP54 and NEMA 4 rating

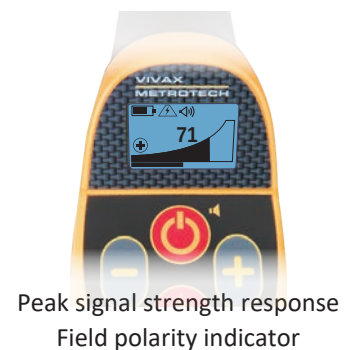

Peak signal strength response
Field polarity indicator

Waterproof carbon-fiber tube
can be submerged in water

	VM-880 Specifications
Construction	High impact ABS injection molded housing Carbon fiber reinforced antenna tube
Weight & Dimensions	0.7kg (L x W x H) 1090 x 88 x 67mm
Display	High-contrast DOT Matrix LCD shows Signal level (Response), polarity, battery condition
Battery life	2 x AA (LR6) Alkaline batteries Typically provide 28+ hours of battery life at 21°C
Antennas	Dual Magnetometers
Environmental	IP65
Operator Controls	On/off/volume - Short press to turn "on" - Short press to toggle between zero, medium or high volume - Long press to turn off Auto Time off - unit will shut down if no control button is touched for 15 minutes Sensitivity Control - "+" increase sensitivity - "-" reduces sensitivity Auto Sensitivity - centers the sensitivity response on the display, long press to invert screen

What's in the box



VM-880 receiver




Battery holder



AA Alkaline battery



USB cable



User Guide



VM-880 carry bag

Typical Locate Capability*

Small PK Nail
to depth of 6"(15cm)



Large PK Nail
to depth of 10" (25cm)



Marker Stake
to depth of 8ft(2.4m)



Valve Box
to depth of 10ft(3m)



Cast Iron Pipe Joint
to depth of 9ft(2.7m)



Manhole Cover
to depth of 10ft(3m)



5inch Iron Pipe
to depth of 10ft(3m)



Large Iron Tank
to depth of 16ft(4.8m)



* Typical metal (ferrous or steel) objects are shown here. The Depth range depends on mass of the metal and may vary greatly from what is indicated above.

Local Vivax-Metrotech Distributor:



Download Sales Sheet

Metrotech Vertriebs GmbH

Am steinernen Kreuz 10a
96110 Schesslitz, Germany

Sales Tel: +49 9542 77227-42

Service Tel: +49 9542 77227-43

Email: SalesEU@vxmt.com

CONNECT WITH US ON SOCIAL MEDIA



V1.0